


## OF129: FIBC Bulk Bags Technical Specification

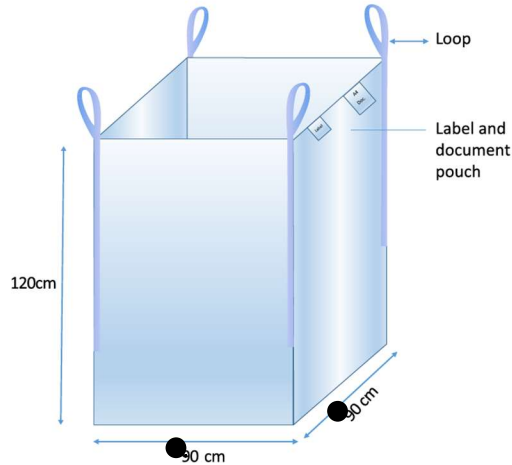

Suitable for repackaging, construction site, waste, sands, soils, stone, pebbles, rubber and recycling etc.

|   |  |
|---|--|
| <b>Bag size: 110 x 110 x 120 cm</b>                               | <b>Safe Working Load: 1500 Kg</b>      |
| Test Certification: ISO 21898                                     | Fabric GSM: 160                        |
| Safety Factor: 5:1 (For single use, can be lifted multiple times) | Liner: None                            |
| Lamination: None  | Loop length: 30 cm, width: 40 mm       |
| Bag type: 4 corner loops  | Fabric type: U-Panel or Circular woven |
| Fabric colour: White  | Discharge: Closed/ Flat Bottom         |
| Filling: Open Top   | Bag weight: 1622 grams (+/-4%)         |
| Sewing thread: White  | Pouch: None                            |
| Packing: 230 or 255 bags/pallet                                   | UV Treated                             |

The specification rarely varies with different orders.